


Filter 6/10 A

Leistungsmerkmale	Characteristics	
Netzspannung	Mains voltage	90 - 260V
Frequenz	Frequency	4 – 63 Hz
Umgebungstemperatur	Ambient temperature	70°C
Feuchteklasse	Humidity class	G acc. to DIN 40040
Kapazitätstoleranz	Capacity tolerance	± 20%
Induktivitätstoleranz	Inductive tolerance	-30% / +50%
Entladewiderstand	Discharge resistor	470 kΩ
Stecker	Connectors	AMP 6,3

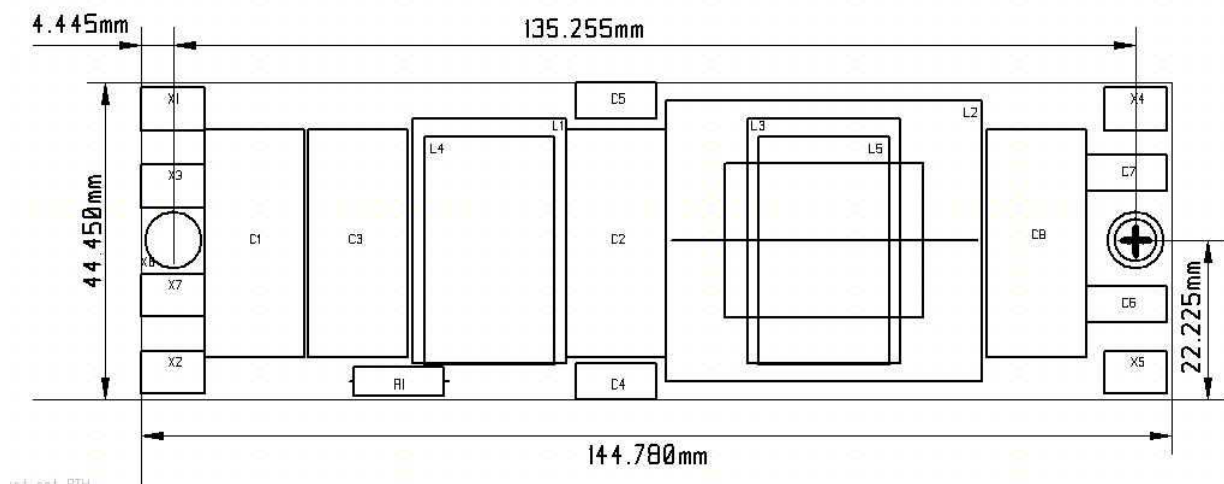

Current	Order No.	Capacitance	Inductance	Height
10A	32 317 1000	3,2µF X2+1µFX2+2x3,3nF Y+2,2µF X2	2x6mH+1,5mH	42mm
6A	32 322 1000	3,2µF X2+1µFX2+2x3,3nF Y+2,2µF X2	2x2mH+2x2mH	42mm