


EMV Filter

EMC filters

Leistungsmerkmale	Characteristics	
Netzspannung	Mains voltage	90 - 260V
Frequenz	Frequency	47 – 63 Hz
Umgebungstemperatur	Ambient temperature	70°C
Feuchtekategorie	Humidity class	G acc. to DIN 40040
Kapazitätstoleranz	Capacity tolerance	± 20%
Induktivitätstoleranz	Inductive tolerance	-30% / +50%
Entladewiderstand	Discharge resistor	470 kΩ
Stecker	Connectors	AMP 2,8

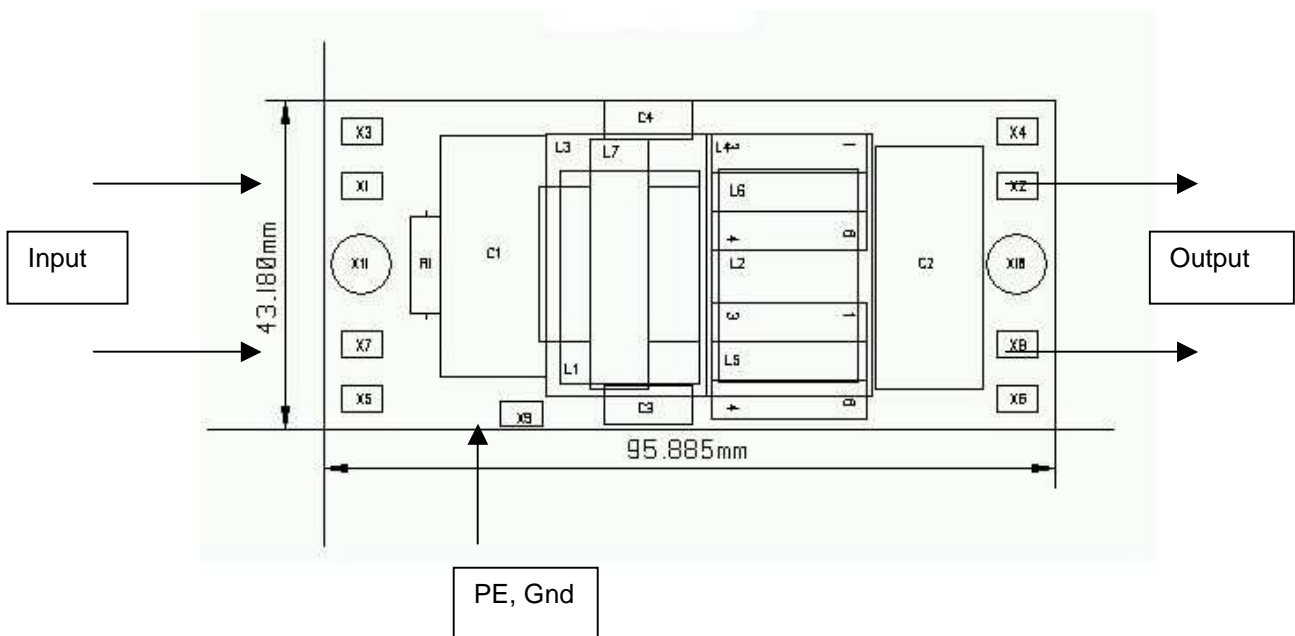

Current	Order No.	Capacitance	Inductance	Height
3,2A	32 316 1000	0,68µF X2+2x3,3nF Y+1µF X2	2x 6,8mH+140µH+140µH	35mm
4,5A	32 304 1000	0,68µF X2+2x3,3nF Y+1µF X2	2 x 6,8mH+2x6,8mH	38mm
16A	32 314 1000	0,68µF X2+2x3,3nF Y+1µF X2	2x6mH+2x6mH	40mm
4,5A	32 331 1000	0,68µF X2+2x3,3nF Y+2,2µF X2	2 x 6,8mH+2x6,8mH	38mm
4,5A	32 321 1000	0,68µF X2+2x2,2nF Y+2,2µF X2	2 x 6,8mH+2x6,8mH	38mm