


SCHIEDERWERK

**Distribution Box up to 100 Pair
LSA+ Quick Connection**

Technical Specifications

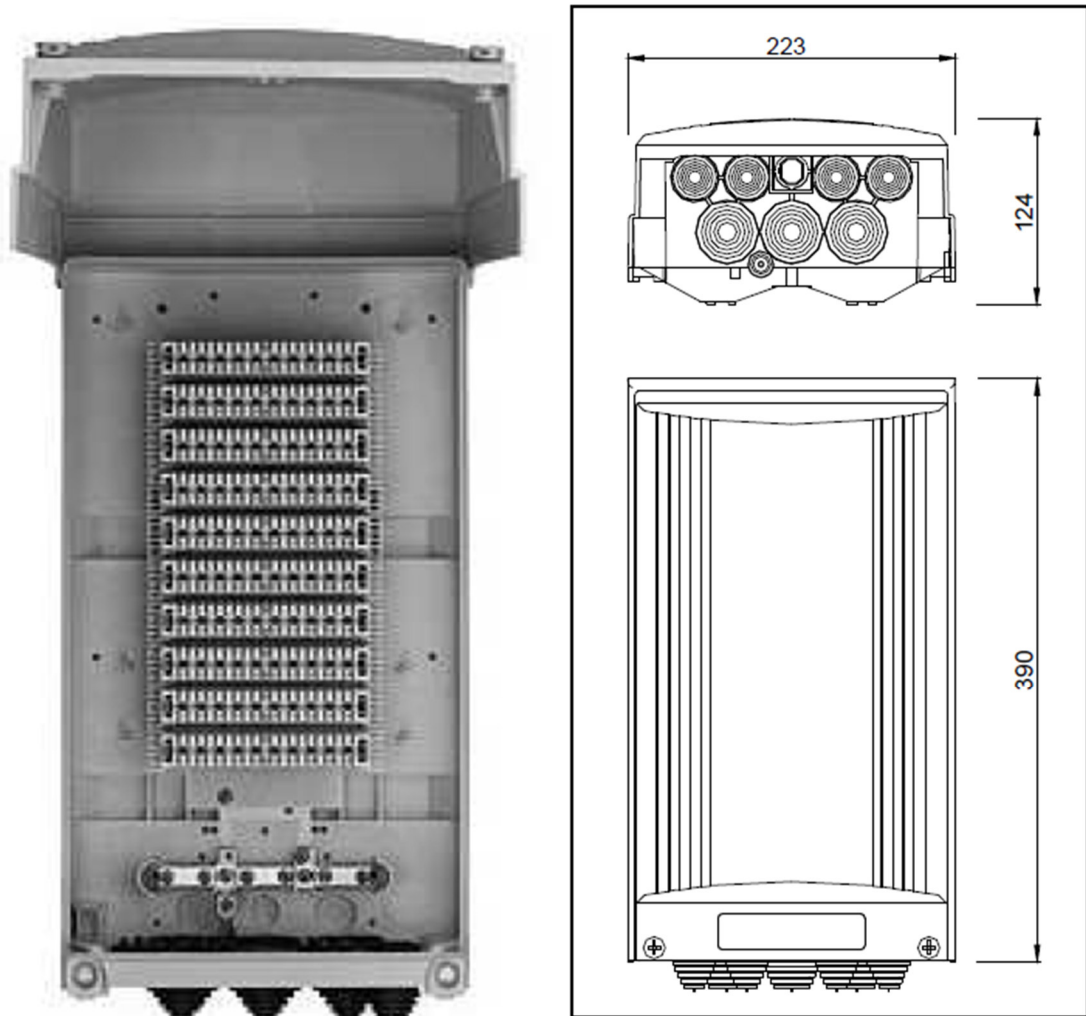

Description

- Housing with hinged cover (opening approx. 110°)
- Space for owner's label on the cover approx. 24 mm x 100 mm
- Space for additional label on the cover approx. 300 mm x 110 mm
- Prepared for mounting on wall or pole (wood, metal or concrete)
- No additional pole mounting kit necessary
- Protection class IP 54 (optional IP 64 with sealing)
- Cover closed with 2 special screws secured against loss
- Cable entry:
 - 3 x for cable up to Æ 32 mm
 - 4 x for cable up to Æ 23 mm
 - 1 x for cable up to Æ 9 mm (for earth connection)
- Prepared for surge protection
- Backmount frame for 10 connection modules LSA+
- Earth wire up to Æ 4 mm possible
- Sheath grounding clamps
- Option of locking: lock

Material

Housing:	ASA, UV-stabilized, UL 94 V-0, grey
Cover:	glass-fiber reinforced polyester HUP 19/23, grey
Screws (for cover):	polyamid UV-stabilized
Grommets:	synthetic rubber, black or polyethylene, black
backmount frame:	stainless steel
Earthing:	brass, nickel plated and stainless steel
Screws:	stainless steel

Order No.:	051 110 300 without connection modules
	051 110 310 with 10 connection modules

Last Update: 11/2004